IRIS ANALYTICAL

WEIGHING SCALES/BALANCES











cs@irisanalytical.com

+1 706 760 4500

www.irisanalytical.com

Top-loading Balances 0.1g IBL-2000 Series feature weighing capacities of 200 g, 600 g, 1000 g, 1200 g and readabilities of 0.1g/0.01g. Some applications include weighing, counting, check weighing, weighing under unstable conditions, peek hold and percentage (%).

Iris top-loading balances are designed for routine weighing applications in your workplace, offering accuracy and repeatability during essential weighing applications in education, laboratory and, industrial sector. It delivers competitive performance at an economical price, featuring RS232 connectivity for easy communication, and a backlit display and a simple interface for uncomplicated operation, these balances are perfectly designed for your workplace.

Standard features include Basic functionality for routine weighing applications. Equipped with three essential weighing modes, RS232 connectivity for data transfer and storage and internal calibration (in selected models) making them ideal for routine weighing applications.


Designed for uncomplicated operation with easy-to-use display and interface Equipped with an easy-to-read, bright backlit display and a simple user interface, they are incredibly easy to operate, with almost no training required.

Smart design and durable construction Iris top pan balances have a small footprint which saves on benchtop space while providing a large weighing surface. They are durably constructed, and feature a stainless-steel pan to withstand day-to-day use in the workplace.

- Standard RS-232 connectivity for easy data transfer
- 3 essential weighing modes
- Easy-to-read, bright backlit display and a simple user interface
- LED display for showing the active functions
- High readability 0.1 g or 0.01 g
- Fast stabilization and response time of 1.5 seconds
- 125 mm round weighing pan

Model	IBL-2100		IBL-2200		IBL-2300		IBL-2400		
Capacity	200 g		600 g		1000 g		1200 g		
Resolution	0.1g/0.01g								
Repeatability	±0.2g/±0.02g								
Display	LED								
Pan Dimension	125 mm								
Material	Aluminum Alloy die cast base and mains and Stainless steel pan								
Measuring Parameters	Checking Weighing, piece counting function								
Certification									
Stabilization Time	1.5 seconds								
Dimension	290x1850x80 mm								
Weight	1800 g								
Electrical Requirement	110V	240V AC	110V	240V AC		110V	240V AC		110V	240V AC
Catalogue No.	680950501	680950502	680951001	680951002	680951501		680951502	680952001		680952002

IRIS ANALYTICAL

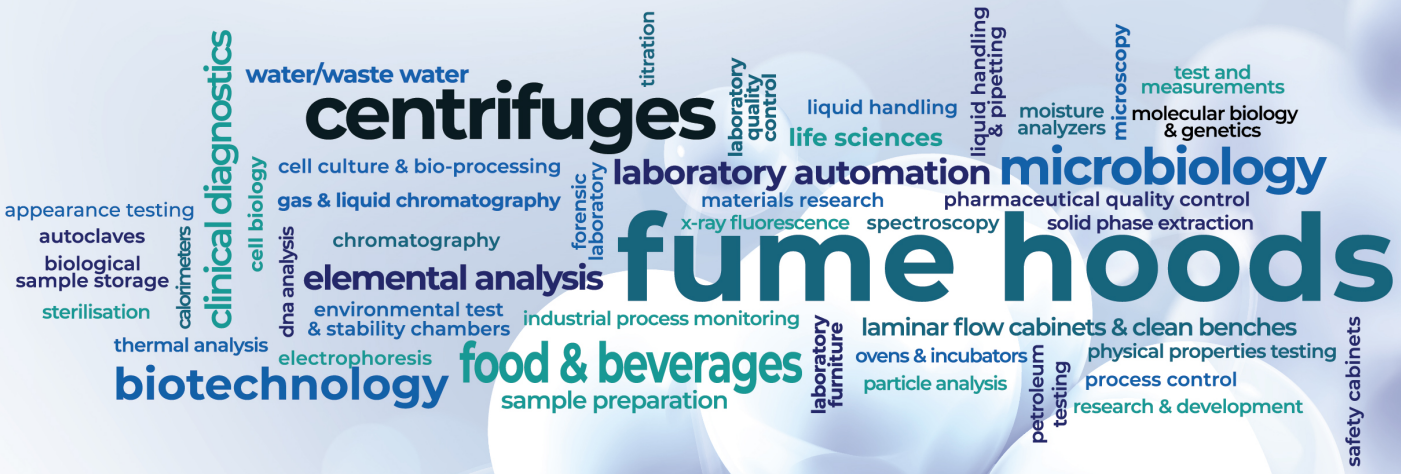

IRIS Analytical Inc.

cs@irisanalytical.com +1 706 760 4500 www.irisanalytical.com