IRIS ANALYTICAL

REFRIGERATORS & ULTRA-LOW FREEZERS



cs@irisanalytical.com

+1 706 760 4500

www.irisanalytical.com




Chest Type Medical Freezers -25℃ ICMF-200 Series design for a large amount of freezer storage, the available maximum capacities are 105 L and 485 L with a temperature range of -10°C to -25°C by offering excellent temperature uniformity and stability. Build-in inner door to avoid more cooling leaking out, and provide more stable inside temperature performance and complete temperature alarm system featuring. Used to stores vaccines, blood plasma, and many other biological products. Built-in wheel casters to provide adjustable support safest and secure unit on any rough surface. Features cooling fan for instrument safety, durability, and endurance purpose. The range of medical freezers storage products will permit you to choose the perfect match to meet your requirements through cost and energy saving.

- Our ICMF-200 series are chemically stable and maintain durability, commercially available and eco-friendly, safe refrigerant
- Available in two models: single door chest and double door chest freezer
- Provide high-density CFC and Free urethane foam insulation making instrument more rigid and strong, stable storage temperature
- Temperature can be controlled using a microprocessor
- Digital display with adjustable temperature range: -10°C to -25°C
- Accommodate LED digital display for clear observation
- Build-in inner door to avoid more cooling leaking out, and provide more stable inside temperature performance
- Provide easy door opening with upright side door and handle limit door hinge to prevent a collision when door open
- Lockable caster design for customer to move as needed
- Wide voltage tolerance design with an applicable voltage range of 187 to 242 V/AC
- Two types of alarm indications: audible buzzing and visible flashing light.
- Adopt alarm for different function: alarms including high and low temperature, sensor error, power off, temperature controller malfunction, door ajar, power failure protect: the device would be attacked by the high current when all devices restart simultaneously, the start-delay function would protect the device from the damage
- Regulator and control password protection function to avoid unwanted access

Accessories

- Caster
- Foot
- Test hole
- USB connector
- Remote alarm
- RS232N485connector
- CO2 backup system

IRIS ANALYTICAL

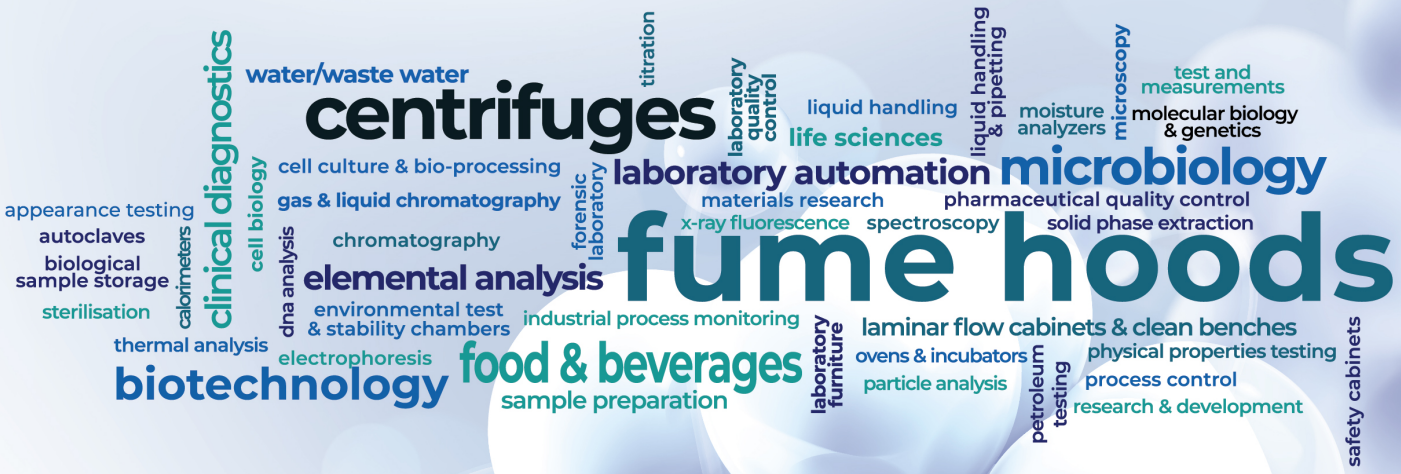

IRIS Analytical Inc.

cs@irisanalytical.com +1 706 760 4500 www.irisanalytical.com