

PUMPS & ASPIRATORS

cs@irisanalytical.com


+1 706 760 4500

www.irisanalytical.com

Laboratory Peristaltic Pump ISPP-4551 has 0.00166 to 1330 ml/min flow rates and excellent dosing that used for the timer function of simple dispensing function along with 8 modes of external control of RS232 standard interface along with optional RS485 Modbus interface communicator.

- Equipped with toggle switch control
- Support RS232 and RS485, the pump can be connected with PC to reach dispensing and filling function
- 3 Digital LED display the current speed
- Plastic coated constructing material
- A quick exchange of pump heads without the use of tools
- The strong, powerful, regulated drive unit
- Negligible noise and vibration
- Testing time range 0.5 s to 999 s
- Toggle switch and rotary encoded switch are used to control unit

IRIS ANALYTICAL

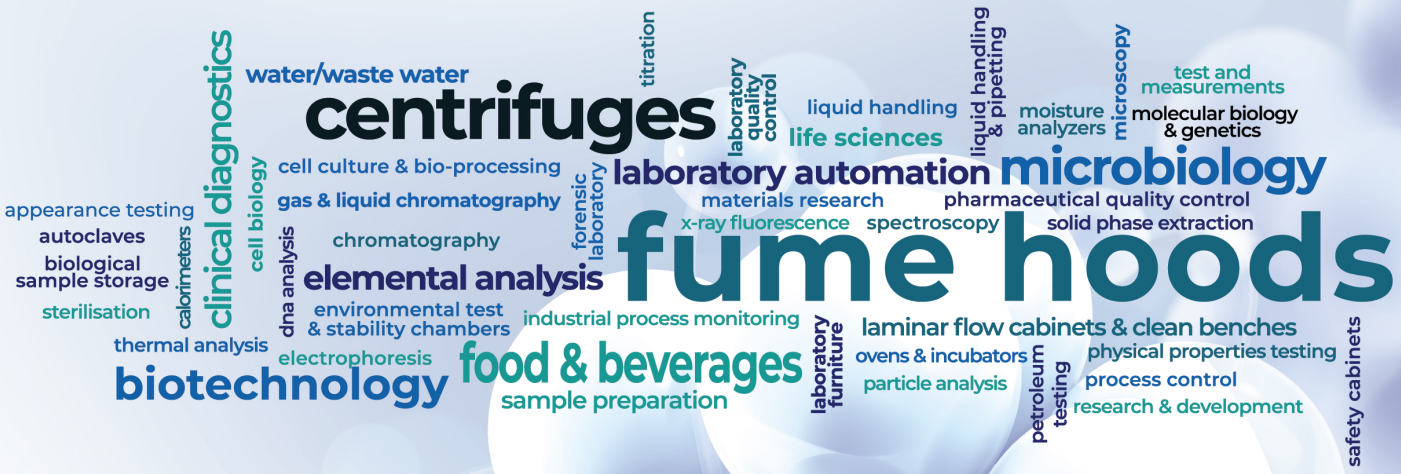

IRIS Analytical Inc.

cs@irisanalytical.com +1 706 760 4500 www.irisanalytical.com