

PUMPS & ASPIRATORS

cs@irisanalytical.com


+1 706 760 4500

www.irisanalytical.com

High Flow Rate Simple Peristaltic Pump IFPP-130 has 0.000166 to 2280 ml/min flow rates and excellent dosing that used for the timer function of simple dispensing function along with RS232, RS485 Modbus interface communicator.

- Allow stacking of 4 pumps head for same drive, creating multichannel pump system
- 4.3-inch industrial grade LCD screen display
- High repeatability on all channels
- The directional signal comes with passive switch signal like foot pedal along with optional active switch signal: 5V, 12V, 24V
- Flow rate accuracy of pump <±0.5% and 300,000 times keypad lifetimes
- To control the speed of the pump knob are used
- Equipped with 3 different working mode including fixed volume metering, fixed time and volume, and timer start and stop
- Terrific online micro-adjusting and intelligent calibration function
- Easy installation and low maintenance condition
- Materials have good rigidity and high precision along with resisting organic solvent corrosion property
- Adjust the pump as per the need

IRIS ANALYTICAL

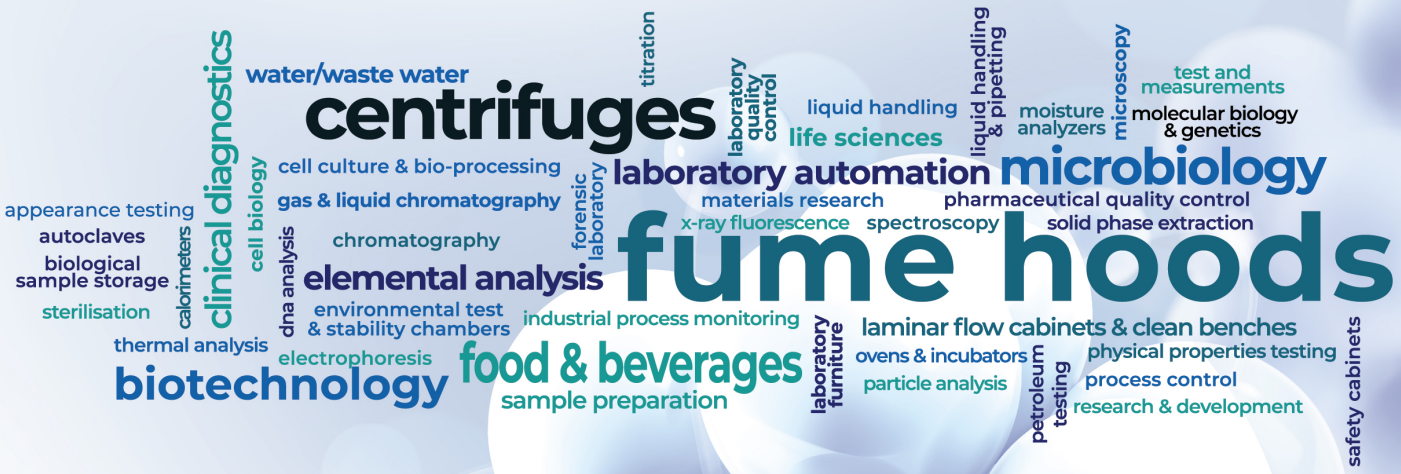

IRIS Analytical Inc.

cs@irisanalytical.com +1 706 760 4500 www.irisanalytical.com