
Benchtop Low Speed Refrigerated Centrifuge IBRLC-4205




Benchtop Low Speed Refrigerated Centrifuge IBRLC-4205 featured with LED touch screen with multi-functional knob combination parameters.It is sealed and can function at low RPM owing to the ability to reduce the heat produced by higher rotation speeds worked under temperature range -20℃ to 40℃. Accommodates angle, as these motor capable of accommodating a great number of tubes at once. Available with 10 profiles for acceleration and for deceleration with high efficiency. Additionally, it comes with AC brushless converter motor, equipped with multiple types of rotor and adaptors, applicable to radioactive immunology, clinical medicine, biochemistry, pharmaceutics, isolation and purification of blood samples.

Rotors



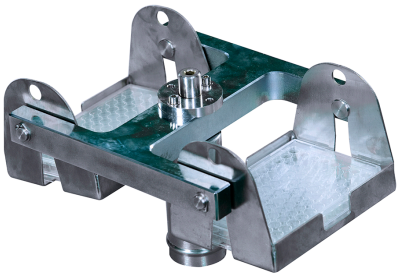



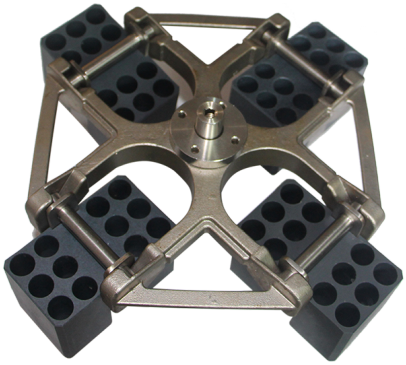

Technical Specification:

Model	IBRLC-4205
Speed Range (rpm)	5500rpm
Max RCF	5310×g
Capacity	4×750ml
Speed Control Accuracy	±20 rpm
Temperature Range (℃)	-20℃ to 40℃
Temperature Accuracy (℃)	±2.0℃
Timer	1 to 99min
External Dimemsions (HxLxW) mm	645×700×445 mm
Net Weight (kg)	95 kg
Gross Weight (kg)	115 kg
Shipping Dimensions (HxLxW) mm	745×800×545 mm
Power	1500W
Electrical Requirements	AC 220±22V 50Hz 10A
Catalogue No.	1401251502

Technical Data:

Model	IBRLC-4204	IBRLC-4206	IBRLC-4205
Capacity	4×250ml	4×250ml	4×750ml
Max RCF	4390×g	5190×g	5310×g
Speed Range	5000rpm	6500rpm	5500rpm
Noise	? 65dB?A?		
Rotor Diameter	380 mm		420 mm
Temperature Range	-20? to 40?		
Revolutions/min	±20 rpm		
Temperature Accuracy	±2.0?		
Timer	1 to 99min		
Power Consumption	750 W	800 W	1500 W
Dimension	550×650×365 mm	580×660×365 mm	645×700×445 mm
Packing Dimension	680×760×465 mm	680×760×465 mm	745×800×545 mm
Net Weight	70 kg		95 kg
Gross Weight	85 kg		115 kg
Electrical Requirement	AC 220±22V 50Hz 10A		
Catalogue No.	1401250502	1401251002	1401251502



Iris Analytical Ltd.

66 W Flagler St #900 Miami, Florida 33130 United States