

Polarizing Microscope IMP-1401



Polarizing Microscope IMP-1401 equipped with a high degree of sensitivity and best suited for anisotropic (mineral) specimens such as geology, minerals, metallurgy, university teaching laboratories, and other sectors. Built-in bertrand lens, polarizer and analyzer, 360° rotatable round stage, filter, condenser, etc. the trinocular viewing head with wild field eyepieces and has excellent infinite strain free plan achromatic: 4X/0.10/∞/-17.3 mm, 10X/0.25/∞/0.17-10.0 mm, 40X/0.65/∞/0.17-0.54 mm objectives, and each eye tube has interpupillary adjustment. This series is capable of providing strong images with a broad field of view, the multipurpose and perfect for basic studies of samples properties. Come with 12V/50W halogen lights, allowing samples to be illuminated for a more comprehensive field of view. Accomplished with the help of particular devices known as retardation plates and optical compensators. First order retardation plate is used in optical path differences ranging from a fraction of a wavelength up to several wavelengths. This flexible and multipurpose tool is known by different names, comprising a red plate, red-one plate, lambda (λ) plate, gypsum plate, selenite plate, sensitive violet, or simply a color tint plate and quartz wedge plate is a simple, semi-quantitative optical compensator used to examine optical path differences in a wide range of samples by the quartz wedge. Built in a crystalline block of quartz provide parallel or perpendicular optical axis to the edge of the birefringent crystal.

Sample Images

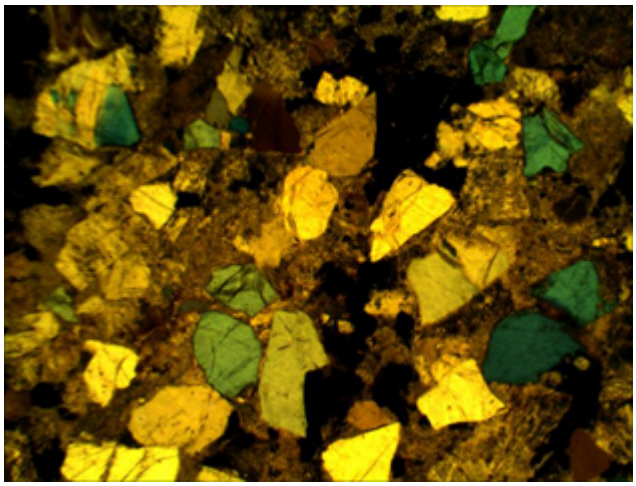

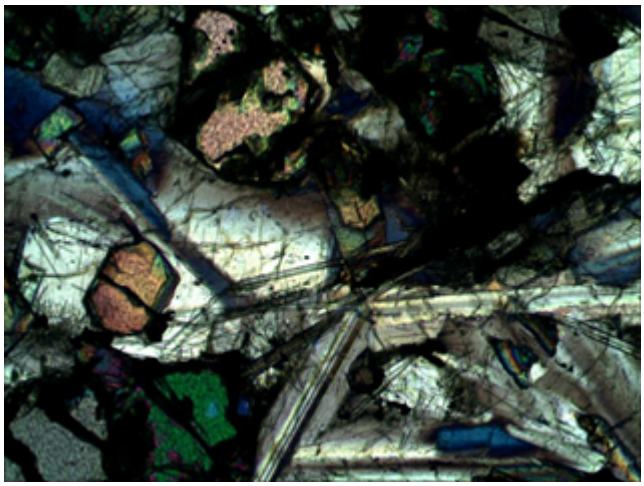

Technical Specification:

Model	IMP-1401
Type	Polarizing Microscope
Viewing Head	trinocular head, Inclined at 30°, Interpupilary 48-75mm
Optical System	Infinite
Focusing	Coaxial coarse & fine adjustment, range 32mm, fine division 0.001mm, coarse stroke 37.7mm/rotation, Fine stroke 0.1mm/rotation
Eyepiece	Plan eyepiece EW10X22mm and Plan eyepiece with scale of crosshair, crosshair, gridding
Nosepiece	Backward quintuple
Objective	Strain-Free Plan Achromatic:4X/0.10/∞/-,17.3mm,10X/0.25/∞/0.17,10.0mm, 40X/0.65/∞/0.17, 0.54mm, 100X/1.25/∞/0.17,0.13mm
Stage	Polarizing Rotatable Stage:170mm, center adjustable, 360° scale, minimum division 1°, minimum reading vernier scale 6', 45° click stop knob
Light Source	24V/100W Halogen lamp transmitted
Filter	Blue filter(optional:ND6 and ND25 Neutral density)
Optional Accessories	video adaptor and filters
Lens	Bertrand lens
Polarising Unit	360° Rotatable, 0° position adjustable
Analysing Unit	0°-360° rotatable analyzer with gradation, minimum gradation: 0.1°
Optical Compensator	gypsum λ plate (first class red), 1/ 4λ plate, quartz wedge plate
Catalogue No.	440230-05-04

Technical Data:

Model	IMP-1401
Type	Polarizing Microscope
Viewing Head	trinocular head, Inclined at 30°, Interpupilary 48-75mm
Optical System	Infinite
Focusing	Coaxial coarse & fine adjustment, range 32mm, fine division 0.001mm, coarse stroke 37.7mm per rotation, Fine stroke 0.1mm per rotation
Eyepiece	Plan eyepiece EW10X22mm and Plan eyepiece with scale of crosshair, crosshair, gridding
Nosepiece	Backward quintuple
Objective	Strain-Free Plan Achromatic:4X/0.10/?/-,17.3mm, 10X/0.25/?/0.17,10.0mm, 40X/0.65/?/0.17, 0.54mm, 100X/1.25/?/0.17,0.13mm(Optional:20X/0.40/?/0.17,5.10mm)
Stage	Polarizing Rotatable Stage:170mm, center adjustable, 360° scale, minimum division 1°, minimum reading vernier scale 6, 45° click stop knob
Light Source	24V/100W Halogen lamp transmitted
Polarizing Unit	360° Rotatable, 0° position adjustable
Analyzing Unit	0°-360° rotatable analyzer with gradation, minimum gradation: 0.1°
Optical Compensator	gypsum ? plate (first class red), 1/ 4? plate, quartz wedge plate
Lens	Bertrand lens
Filter	Blue filter(optional:ND6 and ND25 Neutral density)
Certification	
Optional Accessories	video adaptor and filters
Packing Weight	
Electrical Requirement	
Catalogue No.	440230-05-04



Iris Analytical Ltd.

66 W Flagler St #900 Miami, Florida 33130 United States